



Case Sealer

Uniform Legend TB

Case Sealing for the Real World

This reliable case sealer for industrial environments seals a wide range of cases.

Little David delivers packaging equipment that works for you



The Uniform Legend TB offers:

- ▣ Interchangeable tape cartridges
- ▣ Safe enclosed mast trolley system
- ▣ Heavy duty steel construction
- ▣ Infeed table standard

The Uniform Legend TB replaces:

- ▣ Expensive labor
- ▣ Hand taping boxes
- ▣ Unsafe machinery

Little David Uniform Legend TB


LITTLE  **DAVID**

www.loveshaw.com

Uniform Legend TB

Dimensions:

Uniform Legend TB:

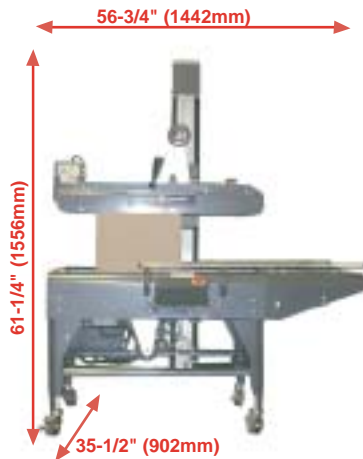

Additional Case Sealer Models:

Also Available Random Legend:

- Semi-automatic case sealer
- Seals top and bottom of random box sizes
- Bottom drive only



Also Available LD-16R:

- Fully automatic case sealer
- Seals top and bottom of random box sizes
- Automatically closes all flaps



Distributor Information:

Features of the Uniform Legend TB:

Reliable Performance - Warranty:

- 1 Year All Components*
- 2 Years Gear Reducer
- 3 Years Cartridge*

*Moving and wear parts are not included. Other restrictions may apply. Consult Loveshaw or your authorized Little David® Distributor for details

Flexible:

- Tapes boxes in a variety of sizes (see below)
- Converts from 2" to 3" wide tape (with additional parts)

Easy Operation:

- Plug in operation
- Minimal operator training required
- Sealed drive system for easy maintenance
- CaseLocker ST™ tape cartridge requires no lubrication
- Front roller pack table

Safe:

- Single enclosed mast design allows clear access
- Knife guard system of the CaseLocker ST™ tape cartridge only allows the blade to be exposed only when the rollers have been depressed

Specifications of the Uniform Legend TB:

Power Requirements:

- 15 Amps @ 120 VAC
(other voltage available, consult Loveshaw)

Air Requirements:

- n/a

Operating Speed:

- Continuous top and bottom drive; 80' per minute (24.4 m/min.)

Closure Material: (pressure sensitive tape)

- Width: 2" or 3" Roll size: up to 15" diameter
(min. conveyor height for 15" diameter is 23")

Case Capacity: (with 2" wide CaseLocker ST™ Cartridge)

- | | |
|------------------------|----------------------|
| ■ Minimum: | Maximum: |
| Height: 4-1/2" (114mm) | Height: 24" (609mm)* |
| Width: 5-1/2" (140mm) | Width: 20" (508mm) |
| Length: 6" (152mm) | Length: infinite |

*Conveyor height minimum is 22-1/4"

Options of the Uniform Legend TB:

- Casters
- Exit table (roller/solid)
- Head limiter
- Voltages (Consult factory)
- Various conveyor heights

LOVESHAW
an ITW Company

2206 Easton Turnpike
P.O. Box 83
South Canaan, PA 18459
Tel: (570) 937-4921 Fax: (570) 937-3229
(800) 572-3434

LOVESHAW Europe

A Division of ITW Ltd.

Unit 9 Brunel Gate
West Portway Industrial Estate
Andover, Hampshire England SP 10 3 SL
Tel: (1264) 357511 Fax: (1264) 355964

